



## OPTISWITCH 4000/5000

Technical Datasheet

Vibration level switches for liquids

- Operates up to 250°C / 480°F and 64 bar / 925 psi
- Pump dry-run detection
- High reliability due to permanent fault monitoring function



**KROHNE**

## Universal liquid level switches

OPTISWITCH 4000/5000 series is a level sensor that uses a vibrating fork for detecting level. It is designed for use in all liquids. It is not affected by foam and external vibration. It is also unaffected by variations of product properties such as  $\epsilon_r$ , viscosity etc.



- ① OPTISWITCH 4000
- ② OPTISWITCH 5100
- ③ OPTISWITCH 5200

### Highlights

- Output options: relay, transistor, NAMUR, contactless electronic switch and 2-wire
- 5000 series: Plastic, aluminium or stainless steel housings
- LED signal lamp for indicating the switching condition (with plastic housing only)
- 5000 series: Large choice of materials for wetted parts. This includes 316L, Hastelloy C4, enamel, ECTFE and PFA.
- 5000 series. Probe length: 53...6000 mm / 2...236"
- Repeatability: +/-2 mm
- Thread connections G/NPT 3/4; flange sizes from DN25 PN40; Triclamp 1" or 2" and other hygienic fittings

### Industries

- Chemicals
- Food & Beverage
- Water & Wastewater
- Oil & Gas

### Applications

- Reactors
- Hygienic and sanitary applications
- Process and storage tanks for liquids
- Dry-run and overflow protection

## Features and Options



### OPTISWITCH 4000 - The economical version

- Simple and robust measuring system, virtually unaffected by the chemical and physical properties of liquids
- Easily mountable in pipelines from DN 25, vessels and tanks
- Outputs: contactless electronic switch or transistor



### OPTISWITCH 5100, 5150 - The compact version

- Standard or HT version, large array of process fittings, housings and electronics
- Outputs: relay, transistor, 2wire, NAMUR or contactless electronic switch
- Process connection option for high temperature up to 250°C / 482°F
- With all relevant approvals (ATEX etc.)
- Version OPTISWITCH 5150 with polished tuning fork e.g. for food processing



### OPTISWITCH 5200, 5250 - The special version with probe extension

- Standard or HT version, large array of process fittings, housings and electronics
- Probe length up to 6000 mm / 236"
- Outputs: relay, transistor, 2wire, NAMUR or contactless electronic switch
- Process connection option for high temperature up to 250°C / 482°F
- With all relevant approvals (ATEX etc.)
- Version OPTISWITCH 5150 with polished tuning fork e.g. for food processing

## Technical data

### OPTISWITCH 4000 C

#### Function

Measurement parameter	Level detection of liquids
-----------------------	----------------------------

#### Measurement accuracy

Hysteresis	Approx. 2 mm / 0.08" with vertical installation
Integration time	Approx. 500 ms
Frequency	Approx. 1200 Hz

#### Operating conditions

<b>Temperature</b>	
Ambient temperature on housing	-40...+70°C / -40...+158°F
Storage and transport temperature	-40...+80°C / -40...+176°F
<b>Process temperature</b>	
Standard	-40...+100°C / -40...+212°F
High temperature version (optional)	-40...+150°C / -40...+302°F
Temperature shock	No limitation
Process pressure	-1...64 bar / -14.5...928 psi
Viscosity (dynamic)	0.1...10.000 mPa s (requirement: with SG=1)
Density	>0.7 g/cm <sup>3</sup> / >0.025 lbs/in <sup>3</sup>

#### Materials

<b>Wetted parts</b>	
Process fitting – thread	316L
Gaskets	Klingersil C-4400
Vibrating element	316L
<b>Non-wetted parts</b>	
Housing	316L and plastic PEI
<b>Surface quality</b>	
Standard	Ra = approx. 3.2 µm / 1.26 <sup>-4</sup> "
Hygienic version	Ra < 0.8 µm / 3.15 <sup>-5</sup> "

#### Process connection

Thread	G¾ A; ¾ NPT; G1 A; 1 NPT
Hygienic fittings	Bolting DN 25 PN 40; bolting DN 40 PN 40; Tri-Clamp 1"; Tri-Clamp 1½"; SMS

## Power Supply

<b>Transistor output</b>	
Supply voltage	10...55 VDC
Power consumption	Max. 0.5 W
<b>Contactless electronic switch</b>	
Supply voltage	20...253 VAC, 50/60 Hz, 20...253 VDC
Power consumption	Approx. 3 mA (via load circuit)
<b>Operating elements</b>	
Control lamp	Illuminated lens for indication of the switching condition.
Mode adjustment	Min./max. adjustment through electrical connection
<b>Electromechanical data</b>	
Plug connection	1x plug M12x1 or 1x plug DIN 43650
Screwed terminals	For wire cross-section up to 1.5 mm <sup>2</sup>

## Output

<b>Transistor output</b>	Floating transistor output, overload and permanently shortcircuit-proof
Load current	Max. 250 mA
Voltage loss	Max. 1 V
Turn-on voltage	Max. 55 VDC
Blocking current	<10 µA
Modes (adjustable)	Min. / max.
Delay time	When immersed: approx. 0.5 s; when uncovered: approx. 1 s
<b>Contactless electronic switch</b>	Contactless electronic switch
Modes (adjustable)	Min. / max.
Delay time	When immersed: approx. 0.5 s; when uncovered: approx. 1 s

## Approvals

<b>Protection category</b>	
Valve plug	IP 65
Valve plug with IDC method of termination	IP 67
M12x1 plug connection (only with transistor output)	IP 66/IP 67
Overvoltage category	III
<b>Protection class</b>	
Transistor output	II
Contactless electronic switch	I
<b>CE conformity</b>	
EMC (89/336/EEC)	Emission EN 61326: 1997 (class B), immunity EN 61326: 1997/A1: 1998
LVD (73/23/EEC)	EN 61010-1: 2001
SIL conformity	OPTISWITCH fulfills the requirements of functional safety according to IEC 61508.

## OPTISWITCH 5000 C series

### Function

Measurement parameter	Level detection of liquids
-----------------------	----------------------------

### Design

Sensor length	
OPTISWITCH 5100 C, 5150 C	See chapter "Dimensions".
OPTISWITCH 5200 C, 5250 C	
316L, 2.4610 (Hastelloy C4)	80...6000 mm / 3...236"
2.4610 (Hastelloy C4) enamelled	80...1500 mm / 3...59"
1.4435 (316L) ECTFE coated	80...3000 mm / 3...118"
1.4435 (316L) PFA coated	80...3000 mm / 3...118"

### Measurement accuracy

Hysteresis	Approx. 2 mm / 0.08" with vertical installation
Integration time	Approx. 500 ms
Frequency	Approx. 1200 Hz

### Operating conditions

Temperature	
Ambient temperature on housing	-40...+70°C / -40...+158°F
Storage and transport temperature	-40...+80°C / -40...+176°F
Process temperature	
316L / Hastelloy C4 (2.4610)	-50...+150°C / -58...+302°F
Process temperature with temperature adapter	Option
316L / Hastelloy C4 (2.4610)	-50...+250°C / -58...+482°F
enamelled	-50...+200°C / -58...+392°F
with ECTFE coating	-50...+150°C / -58...+302°F
with PFA coating	-50...+150°C / -58...+302°F
Temperature shock	No limitation
Process pressure	-1...64 bar / -14.5...928 psi
Viscosity (dynamic)	0.1...10.000 mPa s (requirement: with SG=1)
Density	0.7...2.5 g/cm <sup>3</sup> / 0.025...0.09 lbs/in <sup>3</sup> ; 0.5...2.5 g/cm <sup>3</sup> / 0.018...0.09 lbs/in <sup>3</sup> by switching over

## Materials

<b>Wetted parts</b>	
Process fitting – thread	316L; 2.4602 (Hastelloy C4)
Process fitting – flange	316L; 316L with Hastelloy C4 coating; steel enamelled; 316L with ECTFE coating; 316L with PFA coating
Gaskets	Klingersil C-4400
Tuning fork	316L / 2.4610 (Hastelloy C4)
Extension tube $\varnothing 21.3$ mm / $\varnothing 0.84$ "	316L; 2.4610 (Hastelloy C4); 2.4610 (Hastelloy C4) enamelled; 316L with ECTFE coating; 316L with PFA coating
<b>Non-wetted parts</b>	
Housing	Plastic PBT (Polyester), Alu-die casting powder-coated, 316L
Gasket ring between housing and housing cover	NBR (stainless steel housing), silicone (Alu / plastic housing)
Peephole in housing cover	PMMA (Makrolon)
Ground terminal	316L
Temperature adapter (Option)	316L
Gastight leadthrough (Option)	316L / glass
<b>Surface quality</b>	
Standard (OPTISWITCH 5100 C, 5200 C)	Ra = approx. $3.2 \mu\text{m}$ / 1.26-4"
Hygienic version (OPTISWITCH 5150 C, 5250 C)	Ra < $0.8 \mu\text{m}$ / 3.15-5"
<b>Coatings</b>	
ECTFE	Approx. 0.5...0.8 mm / 0.02...0.03"
PFA	Approx. 0.3...0.5 mm / 0.01...0.02"
Enamel	Approx. 0.8 mm / 0.03"

## Process connection

Thread	G $\frac{1}{4}$ A; $\frac{3}{4}$ NPT; G1 A; 1 NPT
Flanges	DIN: $\geq$ DN25; ANSI: $\geq$ 1"
Hygienic fittings (OPTISWITCH 5150 C, 5250 C)	Bolting DN 40 PN 40; Tri-Clamp 1"; Tri-Clamp 1 $\frac{1}{2}$ " PN 10; cone DN 25 PN 40; Tuchenhagen Varivent DN 50 PN 10

## Power Supply

<b>Relay output</b>	
Supply voltage	20...253 VAC, 50/60 Hz, 20...72 VDC (at U > 60 VDC, the ambient temperature can be max. 50°C / 122°F)
Power consumption	1...8 VA (AC); ca. 1.3 W (DC)
<b>Transistor output</b>	
Supply voltage	10...55 VDC
Power consumption	Max. 0.5 W
<b>Contactless electronic switch</b>	
Supply voltage	20...253 VAC, 50/60 Hz, 20...253 VDC
Power consumption	Approx. 3 mA (via load circuit)

<b>Two-wire output</b>	
Supply voltage	10...36 VDC (via the signal conditioning instrument)
<b>NAMUR output</b>	
Supply voltage (standard characteristics)	For connection to amplifier according to NAMUR IEC 60947-5-6, approx. 8.2 V
Open-circuit voltage	$U_0$ approx. 8.2 V
Shortcircuit current	$I_U$ approx. 8.2 mA
Operating elements	
Control lamp	Control lamp (LED) for indication of the switching condition.
Density switch (electronics versions: relay, transistor, contactless electronic switch, two-wire, NAMUR outputs)	
0.5	0.5...2.5 g/cm <sup>2</sup> / 0.018...0.9 oz/in <sup>2</sup>
0.7	0.7...2.5 g/cm <sup>2</sup> / 0.025...0.9 oz/in <sup>2</sup>
Mode switch (electronics versions: relay output, transistor output, contactless electronic switch)	
A	Max. detection or overflow protection
B	Min. detection or dry run protection
Characteristics reversal (electronics version: NAMUR output)	
Max.	Falling characteristics (Low current when immersed)
Min.	Rising characteristics (High current when immersed)
Electromechanical data	
Cable entry/plug (dependent on the version) - Single chamber housing	1x cable entry M20x1.5 (cable ø5...9 mm), 1x blind stopper M20x1.5; attached 1x cable entry M20x1.5 or 1x cable entry ½ NPT, 1x blind stopper ½ NPT, 1x cable entry ½ NPT
Screwed terminals	For wire cross-section up to 1.5 mm <sup>2</sup>

## Output

<b>Relay output</b>	Relay output (DPDT), 2 floating spdts
Turn-on voltage	Min.: 10 mV; max.: 253 VAC/DC
Switching current	Min.: 10 µA; max.: 5 A AC, 1 A DC
Breaking capacity	Max.: 1250 VA, 50 W
Contact material (relay contacts)	AgCdO and Au plated
Modes (adjustable)	Min. / max.
Delay time	When immersed: approx. 0.5 s; when uncovered: approx. 1 s
<b>Transistor output</b>	Floating transistor output, overload and permanently shortcircuit proof
Load current	Max. 400 mA
Voltage loss	Max. 1 V
Turn-on voltage	Max. 55 VDC
Blocking current	<10 µA
Modes (adjustable)	Min. / max.
Delay time	When immersed: approx. 0.5 s; when uncovered: approx. 1 s
<b>Contactless electronic switch</b>	Contactless electronic switch
Modes (adjustable)	Min. / max.
Delay time	When immersed: approx. 0.5 s; when uncovered: approx. 1 s



<b>Two-wire output</b>	
Suitable signal conditioning instruments	SU 501
Output signal	
Min. mode	Vibrating element uncovered: 16 mA $\pm$ 1 mA; vibrating element covered: 8 mA $\pm$ 1 mA
Max. mode	Vibrating element uncovered: 8 mA $\pm$ 1 mA; vibrating element covered: 16 mA $\pm$ 1 mA
Fault signal	<2 mA
Modes (adjustable)	Min. / max. (changeover with the signal conditioning instrument)
Delay time	When immersed: approx. 0.5 s; when uncovered: approx. 1 s
<b>NAMUR output</b>	
Two-wire NAMUR output	
Current consumption	
Falling characteristics	$\geq 2.2$ mA uncovered / $\leq 1$ mA covered
Rising characteristics	$\leq 1$ mA uncovered / $\geq 2.2$ mA covered
Fault signal	$\leq 1$ mA
Necessary processing system	NAMUR processing system according to IEC 60947-5-6 (EN 50227/DIN 19234)
Modes (NAMUR output adjustable to falling or rising characteristics)	Min.: rising characteristics (High current when immersed); max.: falling characteristics (Low current when immersed)

## Approvals

ATEX	ATEX II 1G, 1/2G, 2G EEx ia IIC T6 ①
	ATEX II 1/2G, 2G EEx d IIC T6 ②
	ATEX II 1/2D IP6X T
Ship approval	GL & LR
WHG	German Federal Water Act ③
Protection category	IP 66/IP 67
Overvoltage category	III
<b>Protection class</b>	
Transistor output, two-wire output, NAMUR output	II
Relay output, contactless electronic switch	I
<b>CE conformity</b>	
EMC (89/336/EEC)	Emission EN 61326/A1: 1998 (class B), susceptibility EN 61326: 1997/A1: 1998
LVD (73/23/EEC)	EN 61010-1: 1993
SIL conformity	OPTISWITCH fulfills the requirements of functional safety according to IEC 61508.

① this approval is for 2-wire and NAMUR electronics. It can be combined with either WHG or with ship approval.


② only for the plastic-coated aluminium housing with a 1/2 NPT cable gland. An optional temperature adapter can be used without a gas-tight bushing.

③ only for contactless electronic switch, relay and transistor electronics.

## Dimensions and Weights

OPTISWITCH 4000 - Standard version:

From left to right: thread (M12x1, valve plug DIN 43650 and valve plug DIN 43650 with IDC method of termination)

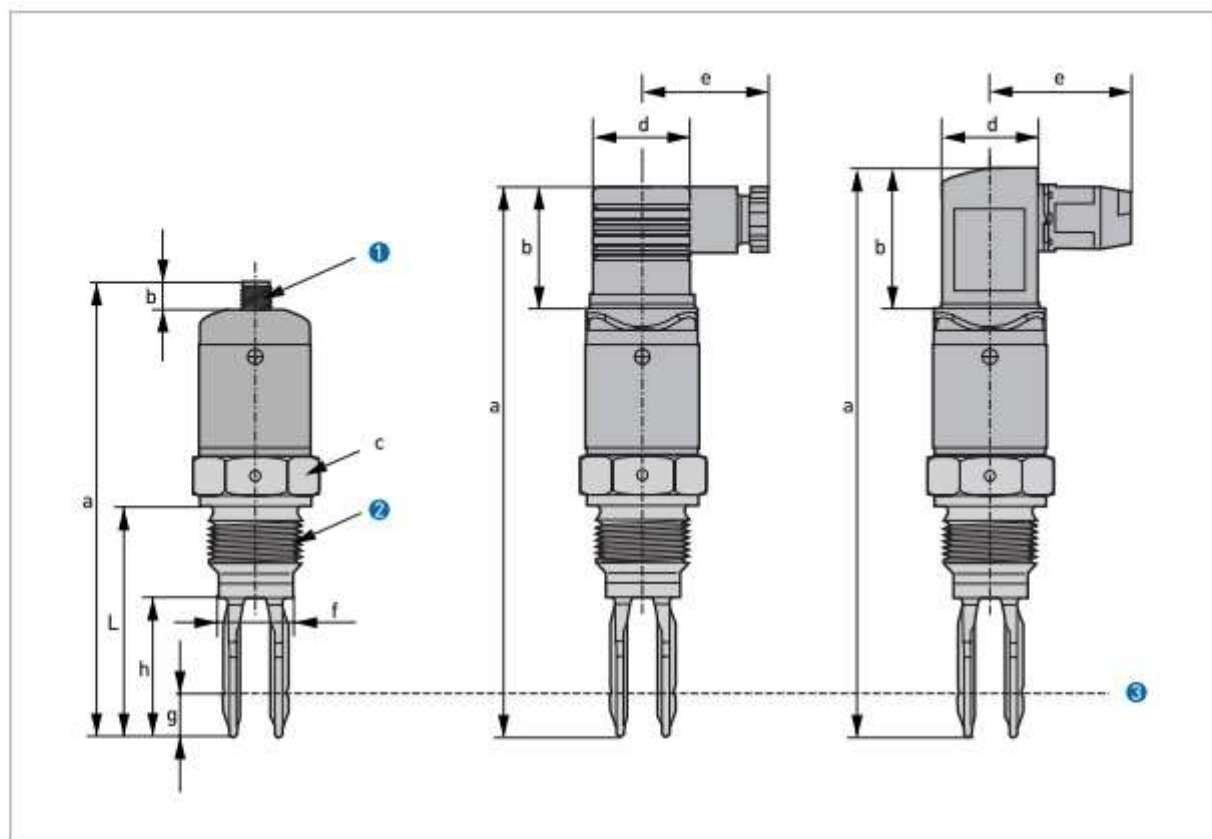

- ① M12x1
- ② Thread G $\frac{3}{4}$  A, G1 A,  $\frac{1}{4}$  NPT, 1 NPT
- ③ Switching point

## Dimensions in mm

	a	b	c	d	e	f	g	h	L
	[mm]								
Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (M12x1)	132.5	10.0	WS 32	-	-	21.3	13.0	40.0	L ①
Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (valve plug DIN 43650)	158.0	35.0	-	27.0	36.0	-	-	-	-
Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (valve plug DIN 43650 with IDC method of termination)	165.0	42.0	-	28.0	42.0	-	-	-	-

① with G $\frac{3}{4}$  A,  $\frac{3}{4}$  NPT: 66 mm; with G1 A, 1 NPT: 69 mm


## Dimensions in inches

	a	b	c	d	e	f	g	h	L
	[inches]								
Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (M12x1)	5.22	0.39	WS 32	-	-	0.84	0.51	1.57	L ①
Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (valve plug DIN 43650)	6.22	1.38	-	1.06	1.42	-	-	-	-
Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (valve plug DIN 43650 with IDC method of termination)	6.50	1.65	-	1.10	1.65	-	-	-	-

① with G $\frac{3}{4}$  A,  $\frac{3}{4}$  NPT: 2.6"; with G1 A, 1 NPT: 2.7"

OPTISWITCH 4000 - Hygienic version:

From left to right: Tri-Clamp (valve plug DIN 43650); Bolting (valve plug DIN 43650); SMS 1145 (valve plug DIN 43650)

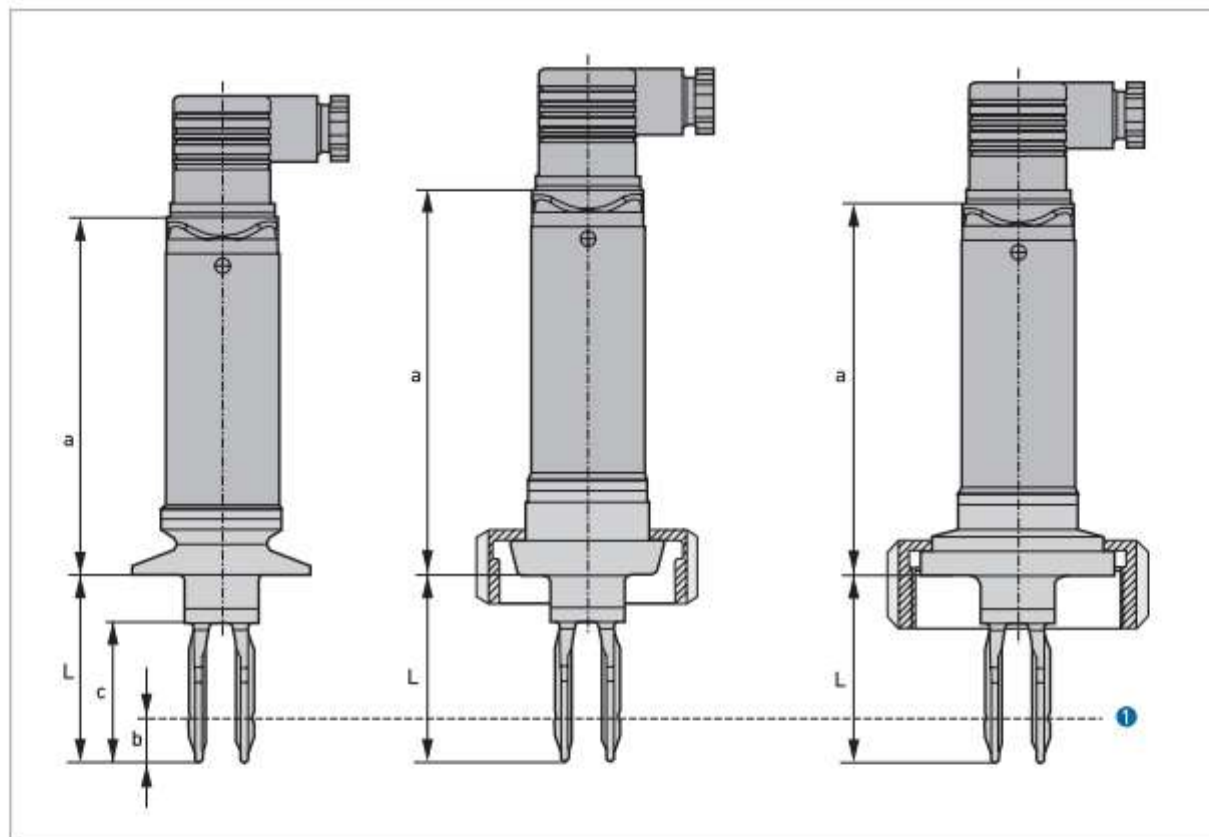

1 Switching point

### Dimensions in mm

	a	b	c	L
	[mm]			
Tri-Clamp (valve plug DIN 43650)	101.0	13.0	40.0	L ⓘ
Bolting (valve plug DIN 43650)	115.0	-	-	L ⓘ
SMS 1145 (valve plug DIN 43650)	105.0	-	-	L ⓘ

ⓘ 53 mm


### Dimensions in inches

	a	b	c	L
	[inches]			
Tri-Clamp (valve plug DIN 43650)	3.98	0.51	1.57	L ⓘ
Bolting (valve plug DIN 43650)	3.53	-	-	L ⓘ
SMS 1145 (valve plug DIN 43650)	4.13	-	-	L ⓘ

ⓘ 2.1"

OPTISWITCH 4000 - High temperature version:

From left to right: thread (M12x1, valve plug DIN 43650 and valve plug DIN 43650 with IDC method of termination)

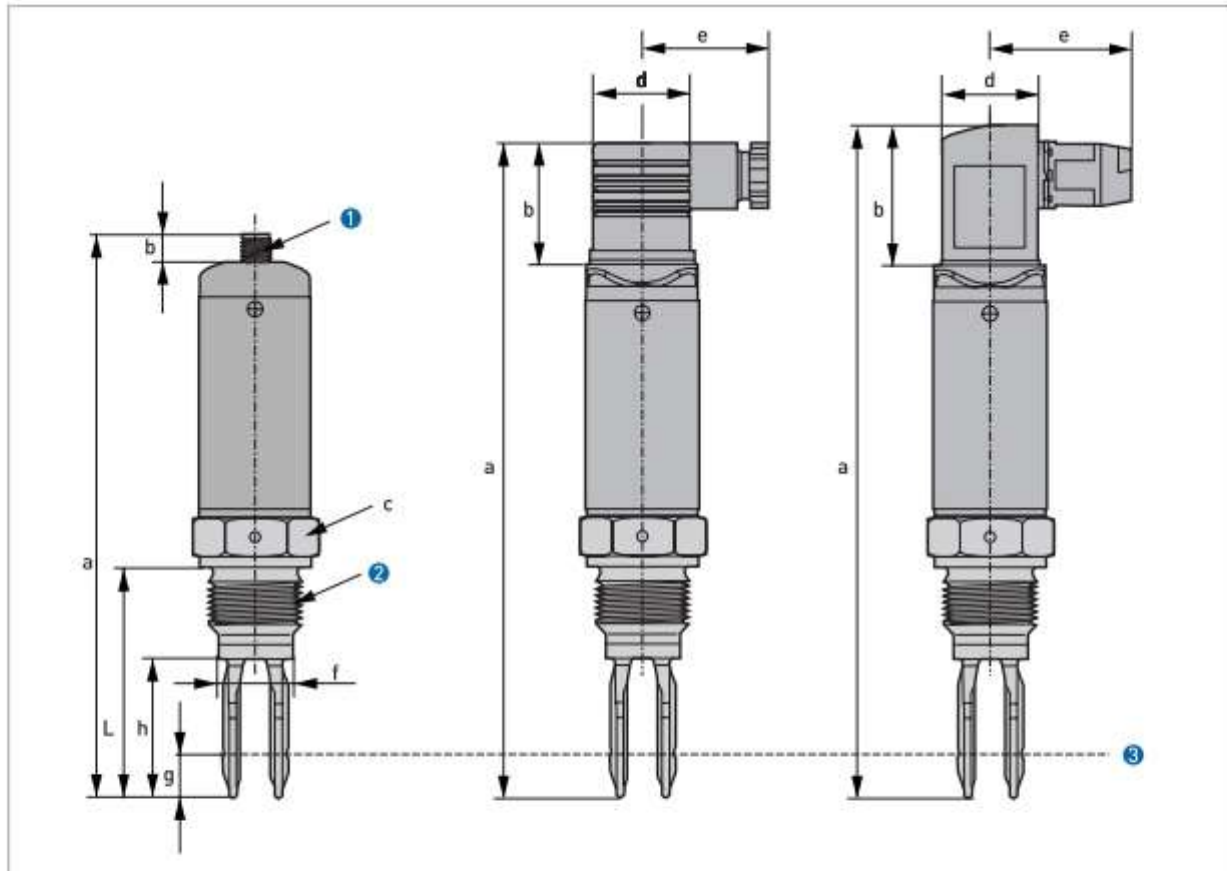

- ① M12x1
- ② Thread G $\frac{3}{4}$  A, G1 A,  $\frac{3}{4}$  NPT, 1 NPT
- ③ Switching point

## Dimensions in mm

	a	b	c	d	e	f	g	h	L
	[mm]								
Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (M12x1)	162.5	10.0	WS 32	-	-	21.3	13.0	40.0	L ①
Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (valve plug DIN 43650)	188.0	35.0	-	27.0	36.0	-	-	-	-
Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (valve plug DIN 43650 with IDC method of termination)	182.0	42.0	-	28.0	42.0	-	-	-	-

① with G $\frac{3}{4}$  A,  $\frac{3}{4}$  NPT: 66 mm; with G1 A, 1 NPT: 69 mm


## Dimensions in inches

	a	b	c	d	e	f	g	h	L
	[inches]								
Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (M12x1)	6.40	0.39	WS 32	-	-	0.84	0.51	1.57	L ①
Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (valve plug DIN 43650)	7.40	1.38	-	1.06	1.42	-	-	-	-
Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (valve plug DIN 43650 with IDC method of termination)	7.15	1.65	-	1.10	1.65	-	-	-	-

① with G $\frac{3}{4}$  A,  $\frac{3}{4}$  NPT: 2.6"; with G1 A, 1 NPT: 2.7"

OPTISWITCH 5000 series - Housing

From left to right: Plastic, Stainless steel and Aluminium housing

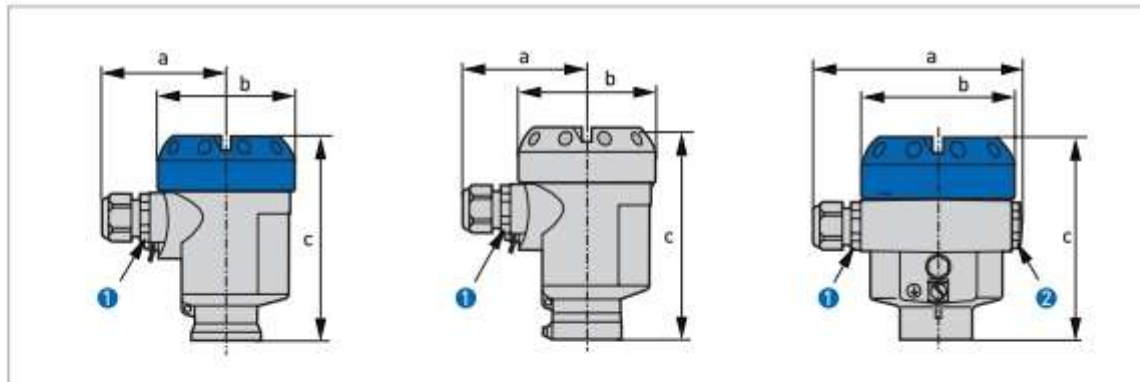


- ① M20x1,5 / ½ NPT
- ② M20x1,5

Dimensions and Weights

	Dimensions			Weight	Dimensions			Weight
	[mm]				[kg]	[inches]		
	a	b	c	a		b	c	
Plastic Housing	69	Ø77	112	0.76	2.72	Ø3.0	4.41	1.68
Stainless steel housing	69	Ø77	117	1.53	2.72	Ø3.0	4.61	3.37
Aluminium housing	116	84	114	1.17	4.57	3.31	4.49	2.58




## OPTISWITCH 5100 C, 5150 C, 5200 C, 5250 C - Temperature adapter

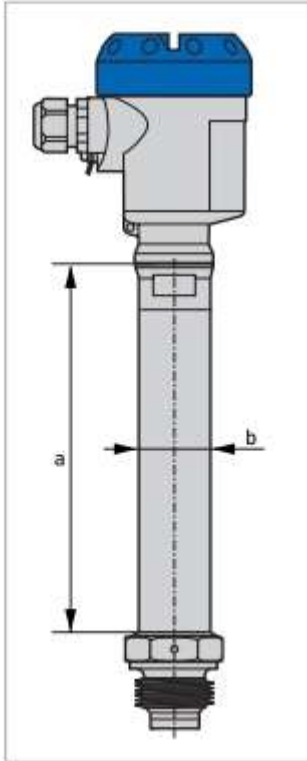

## Dimensions in mm and inches

	a	b	a	b
	[mm]		[inches]	
Temperature adapter	178	Ø34	7	Ø1.34

OPTISWITCH 5100 C, 5150 C

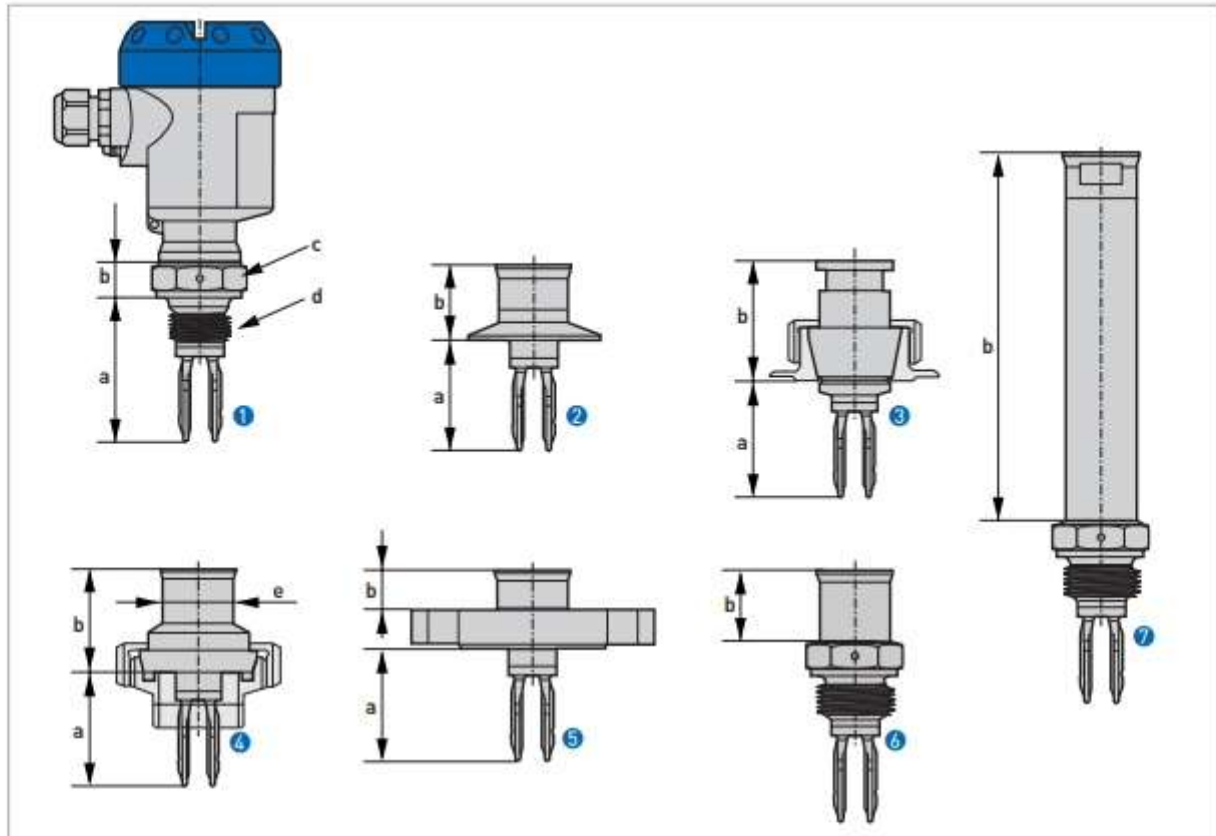

- ① Thread
- ② Tri-Clamp [OPTISWITCH 5150]
- ③ Cone DN 25 [OPTISWITCH 5150]
- ④ Bolting DN 40 [OPTISWITCH 5150]
- ⑤ Flange
- ⑥ Gas-tight leadthrough
- ⑦ Temperature adapter


## Dimensions in mm

	a	b	c	d
	[mm]			
Thread	66	18.5	WS 32 (G¾A; ¾ NPT); WS 41 (G1A; 1 NPT)	G¾A, ¾ NPT; G1A, 1 NPT
Tri-Clamp (OPTISWITCH 5150)	53	36	-	-
Cone DN 25 (OPTISWITCH 5150)	55	57	-	-
Bolting DN 40 (OPTISWITCH 5150)	53	50	Ø33.7	-
Flange	53	19	-	-
Gas-tight leadthrough	-	34	-	-
Temperature adapter	-	178	-	-

## Dimensions in inches

	a	b	c	d
	[inches]			
Thread	2.6	0.72	WS 32 (G¾A; ¾ NPT); WS 41 (G1A; 1 NPT)	G¾A, ¾ NPT; G1A, 1 NPT
Tri-Clamp (OPTISWITCH 5150)	2.09	1.41	-	-
Cone DN 25 (OPTISWITCH 5150)	2.17	2.24	-	-
Bolting DN 40 (OPTISWITCH 5150)	2.09	1.97	Ø1.33	-
Flange	2.09	0.75	-	-
Gas-tight leadthrough	-	1.34	-	-
Temperature adapter	-	7.0	-	-

OPTISWITCH 5200 C, 5250 C

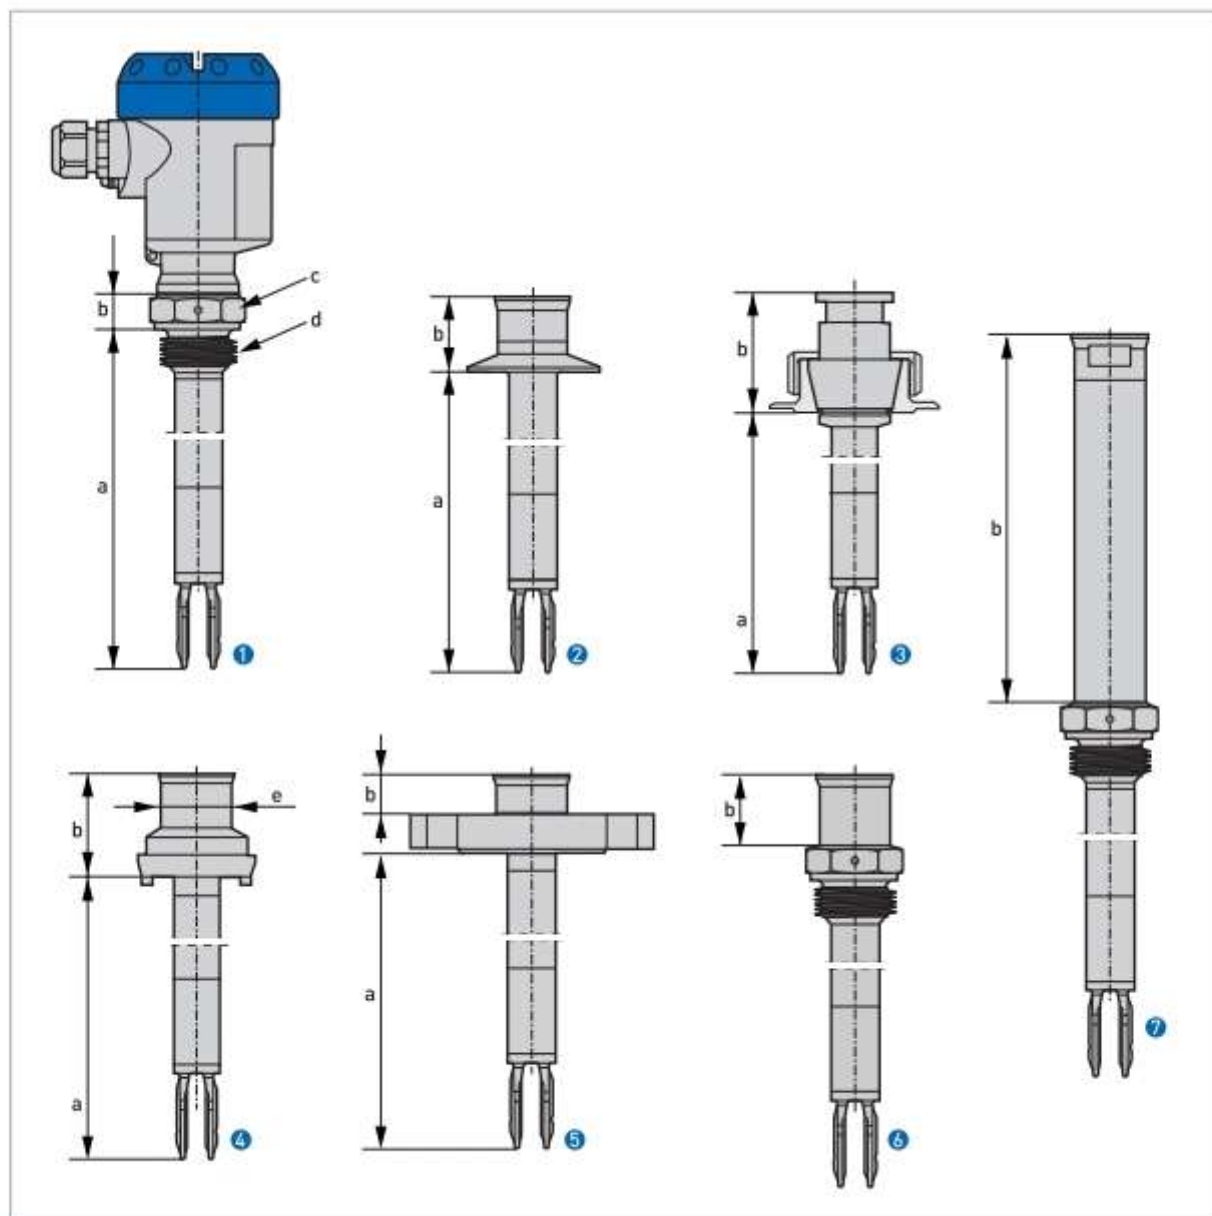

- ① Thread
- ② Tri-Clamp [OPTISWITCH 5250]
- ③ Cone DN 25 [OPTISWITCH 5250]
- ④ Bolting DN 40 [OPTISWITCH 5250]
- ⑤ Flange
- ⑥ Gas-tight leadthrough
- ⑦ Temperature adapter

## Dimensions in mm

	a	b	c	d
	[mm]			
Thread	L ①	18.5	WS 32 (G¾A; ¾ NPT); WS 41 (G1A; 1 NPT)	G3/4A, ¾ NPT; G1A, 1 NPT
Tri-Clamp (OPTISWITCH 5250)	L ①	36	-	-
Cone DN 25 (OPTISWITCH 5250)	L ①	57	-	-
Bolting DN 40 (OPTISWITCH 5250)	L ①	50	Ø33.7	-
Flange	L ①	19	-	-
Gas-tight leadthrough	-	34	-	-
Temperature adapter	-	178	-	-

① Ordered sensor length

## Dimensions in inches


	a	b	c	d
	[inches]			
Thread	L ①	0.72	WS 32 (G¾A; ¾ NPT); WS 41 (G1A; 1 NPT)	G¾A, ¾ NPT; G1A, 1 NPT
Tri-Clamp (OPTISWITCH 5250)	L ①	1.41	-	-
Cone DN 25 (OPTISWITCH 5250)	L ①	2.24	-	-
Bolting DN 40 (OPTISWITCH 5250)	L ①	1.97	Ø1.33	-
Flange	L ①	0.75	-	-
Gas-tight leadthrough	-	1.34	-	-
Temperature adapter	-	7.0	-	-

① Ordered sensor length

## Notes

A large grid of graph paper for taking notes, consisting of a uniform pattern of small squares covering most of the page.

## Notes

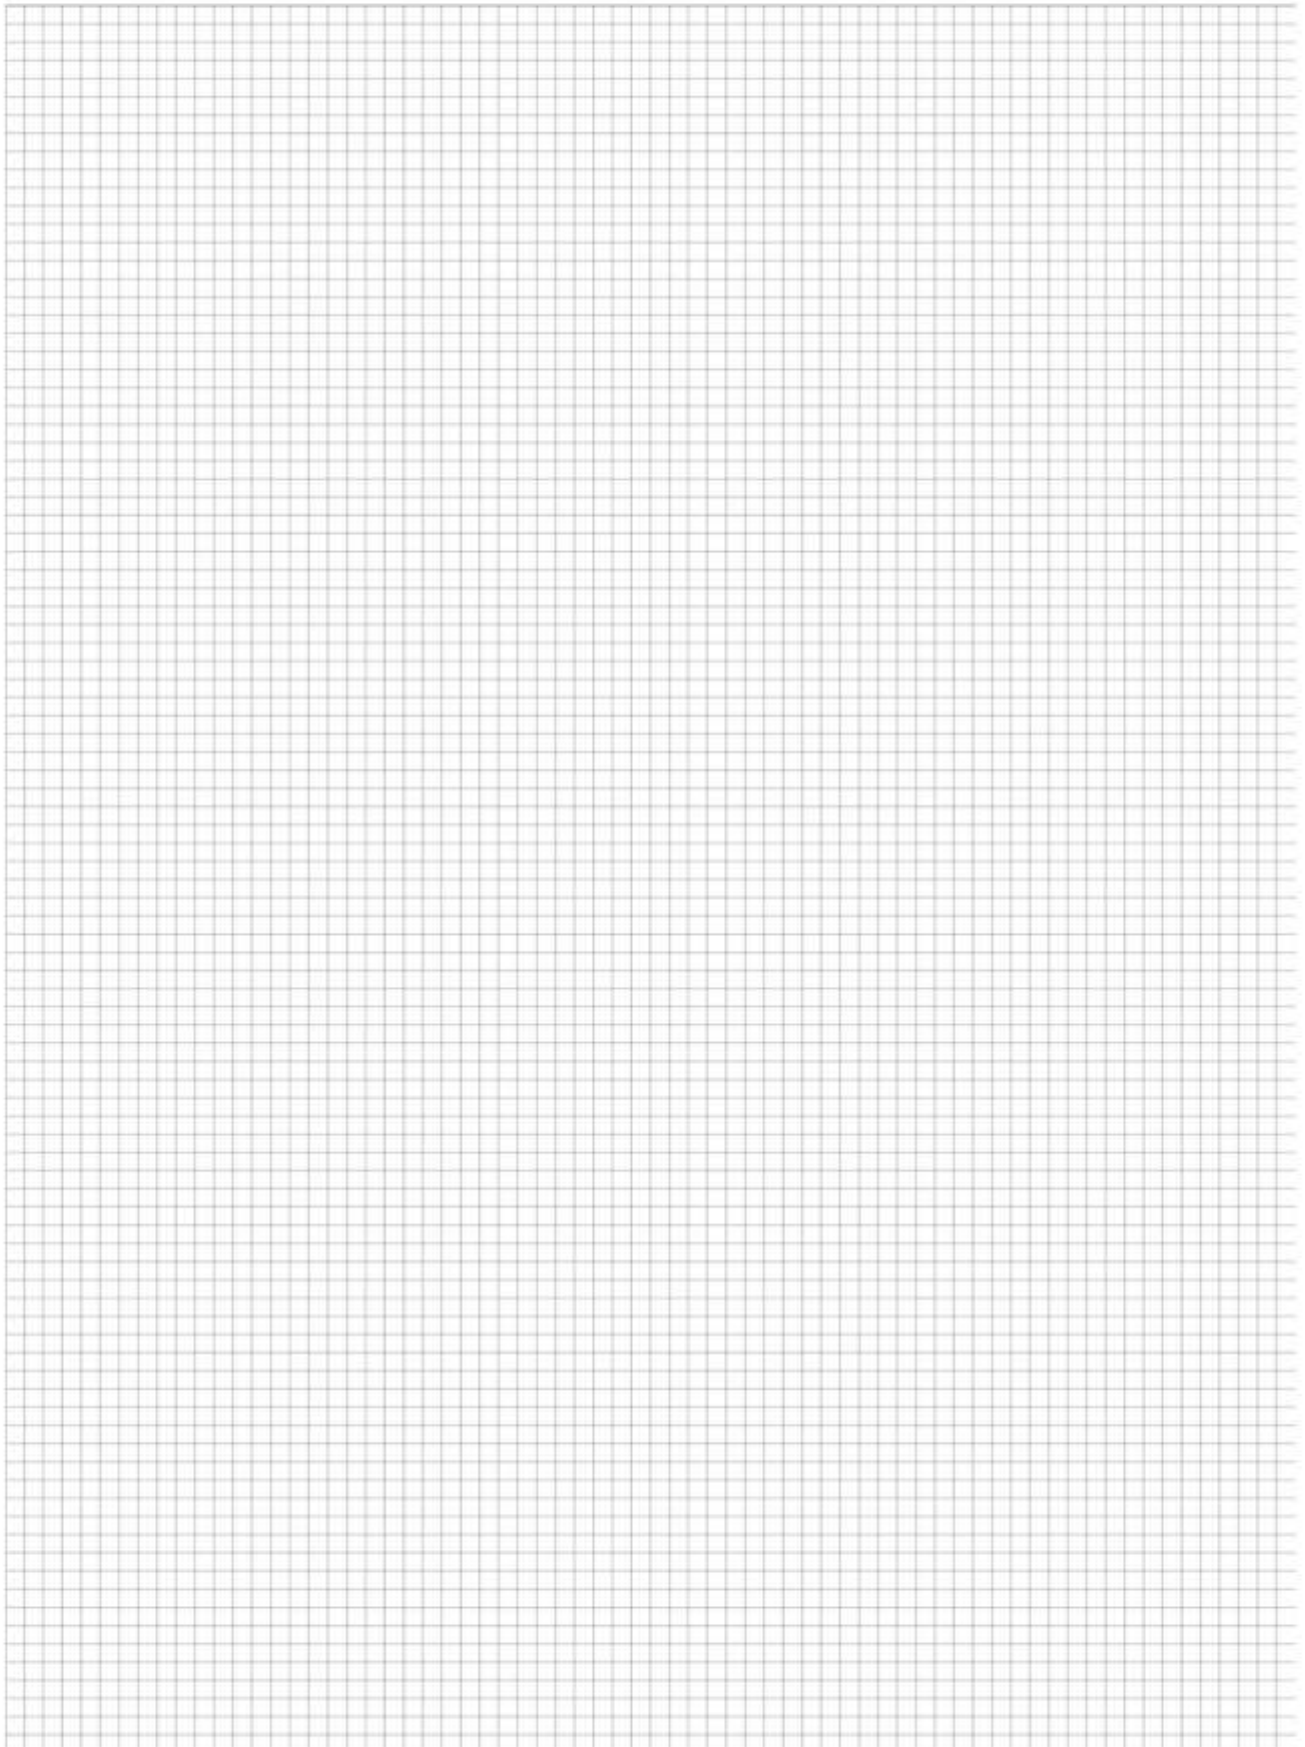A large grid of graph paper for taking notes, consisting of a uniform pattern of small squares.

## KROHNE Product Overview

- Electromagnetic flowmeters
- Variable area flowmeters
- Mass flowmeters
- Ultrasonic flowmeters
- Vortex flowmeters
- Flow controllers
- Level measuring instruments
- Pressure gauges
- Temperature measuring instruments
- Water solutions & analysis
- Oil and gas turnkey solutions

## Addresses:

### Germany

#### Northern sales office

KROHNE Messtechnik GmbH & Co. KG  
Bremer Str. 133  
D-21073 Hamburg  
Phone: +49 [0]40 767 3340  
Fax: +49 [0]40 767 3342  
nord@krohne.de  
ZIP code: 10000 - 29999, 49000 - 49999

#### Western and middle sales office

KROHNE Messtechnik GmbH & Co. KG  
Ludwig-Krohne-Straße  
D-47058 Duisburg  
Phone: +49 [0]203 301 10416  
Fax: +49 [0]203 301 10416  
west@krohne.de  
ZIP code: 30000 - 34999, 37000 -  
48000, 50000 - 53999, 57000 - 59999,  
98000 - 99999

#### Southern sales office

KROHNE Messtechnik GmbH & Co. KG  
Landsberger Str. 392  
D-81241 Munich  
Phone: +49 [0]89 121 5620  
Fax: +49 [0]89 129 6190  
sued@krohne.de  
ZIP code: 0 - 9999, 80000 - 89999,  
90000 - 97999

#### Southwestern sales office

KROHNE Messtechnik GmbH & Co. KG  
Rüdeshalmer Str. 40  
D-65239 Hochheim/Main  
Phone: +49 [0]6146 827 30  
Fax: +49 [0]6146 827 312  
rhein-main@krohne.de  
ZIP code: 35000 - 36999, 54000 -  
56999, 60000 - 79999

#### Instrumentation and control equipment catalog

TABLAR Messtechnik GmbH  
Ludwig-Krohne-Straße 5  
D-47058 Duisburg  
Phone: +49 [0]2 03 305 880  
Fax: +49 [0]2 03 305 888  
kontakt@tablar.de www.tablar.de

### KROHNE sales companies

### International

#### Australia

KROHNE Australia Pty Ltd  
Quantum Business Park 10/287  
Victoria Rd Rydalmere NSW 2116  
Phone: +61 2 8846 1700  
Fax: +61 2 8846 1755  
krohne@krohne.com.au

#### Austria

KROHNE Gesellschaft m.b.H.  
Modocenterstraße 14  
A-1030 Vienna  
Phone: +43 [0]1/203 45 32  
Fax: +43 [0]1/203 45 32 99  
info@krohne.at

#### Belgium

KROHNE Belgium N.V.  
Brusselstraat 320  
B-1702 Groot Bijgaarden  
Phone: +32 [0]2 4 66 00 10  
Fax: +32 [0]2 4 66 08 00  
krohne@krohne.be

#### Brazil

KROHNE Conaut Controles  
Automaticos Ltda.  
Estrada Das Águas Espraiadas, 230  
C.P. 56 06835 - 080 EMBU - SP  
Phone: +55 [0]11-4795-2700  
Fax: +55 [0]11 4795-2768  
conaut@conaut.com.br

#### China

KROHNE Measurement Instruments  
(Shanghai) Co. Ltd., (KMIC)  
Room 1501  
1033 Zhaojiebang Road  
Shanghai 200030  
Phone: +86 21 6487 9611  
Fax: +86 21 6438 7110  
info@krohne-siaa.com

#### Czech Republic

Krohne CZ, spol. s r.o.  
Sebišická 156  
63800 Brno  
Phone: +420 [0]565.242.627  
Fax: +420 [0]545 230 093  
brno@krohne.cz

#### France

KROHNE S.A.S.  
Les Ors BP 98  
F-26103 ROMANS Cedex  
Phone: +33 [0]4 75 05 44 00  
Fax: +33 [0]4 75 05 00 48  
info@krohne.fr

#### Great Britain

KROHNE Ltd.  
Rutherford Drive  
Park Farm Industrial Estate  
Willingborough  
Northants NN8 6AE  
Phone: +44 [0]19 33 408 500  
Fax: +44 [0]19 33 408 501  
info@krohne.co.uk

#### CIS

Kanex KROHNE Engineering AG  
Business-Centre Planeta  
Office 404 ul.  
Mardatskaja 3  
109147 Moscow/Russia  
Phone: +7 [0]095 911 7165  
Fax: +7 [0]095 742 8873  
krohne@del.ru

#### India

Krohne Marshall Ltd.  
A-34/35, M.I.D.C. Industrial Area,  
H-Block  
Pimpri Poona 411018  
Phone: +91 [0]202 744 2020  
Fax: +91 [0]202 744 2020  
pcu@vsnl.net

#### Iran

KROHNE Liaison Office  
North Sohrwardi Ave. 26,  
Sarmad St., Apt. #9  
Tehran 15539  
Phone: +9821 8874 5973  
Fax: +9821 8850 1268  
krohne@krohneiran.com

#### Italy

KROHNE Italia Srl.  
Via V. Monti 75  
I-20145 Milan  
Phone: +39 02 4300 661  
Fax: +39 02 4300 6666  
info@krohne.it

#### Korea

KROHNE Korea  
Room 508 Miwon Bldg 43  
Yado-Dong Yeongdeungpo-Ku  
Seoul, Korea  
Phone: 00-82-2-782-1900  
Fax: 00-82-2-780-1749  
mail@krohne.co.kr

#### Netherlands

KROHNE Nederland B.V.  
Kerkeplaat 14  
NL-3313 LC Dordrecht  
Phone: +31 [0]78 630 6200  
Fax: +31 [0]78 630 6405  
Service Direct: +31 [0]78 630 6222  
info@krohne.nl

#### Norway

KROHNE Norway A.S.  
Ekholtveien 114  
NO-1521 Moss  
Phone: +47 [0]69 266 860  
Fax: +47 [0]69 267 333  
postmaster@krohne.no

#### Poland

KROHNE Polska Sp.z o.o.  
ul. Stary Rynek Ołwiński 8a  
80-324 Gdansk  
Phone: +48 [0]58 520 9211  
Fax: +48 [0]58 520 9212  
info@krohne.pl

#### Switzerland

KROHNE AG  
Uferstr. 90  
CH-4019 Basel  
Phone: +41 [0]61 638 30 30  
Fax: +41 [0]61 638 30 40  
info@krohne.ch

#### Singapore

Tokyo Keiso - KROHNE (Singapore)  
Pte. Ltd.  
14, International Business Park,  
Jurong East  
Chiyoda Building, #01-01/02  
Singapore 609922  
Phone: [65] 6567 4568  
Fax: [65] 6567 9874  
tka@tokyokeiso-krohne.com.sg

#### Republic of South Africa

KROHNE Pty. Ltd.  
Bushbock Close  
Corporate Park South  
Midrand, Gauteng  
P.O. Box 2049  
Midrand, 1685  
Tel.: +27 [0]11 314 1391  
Fax: +27 [0]11 314 1681  
midrand@krohne.co.za

#### Spain

I.L. KROHNE IBERIA, S.r.l.  
Polígono Industrial Nilo  
Calle Brasil, nº. 5  
28806 Alcalá de Henares Madrid  
Phone: +34 [0]91 883 2152  
Fax: +34 [0]91 883 4854  
krohne@krohne.es

#### USA

KROHNE, Inc.  
7 Dearborn Road  
Peabody, MA 01960  
Phone: +1 [978] FLOWING  
Phone: +1 [978] 535 6060 (in MA)  
info@krohne.com

### Representatives

Algeria  
Argentina  
Cameroon  
Canada  
Chile  
Columbia  
Croatia  
Denmark  
Ecuador  
Egypt  
Finland  
Gabon  
Ghana  
Greece  
Hong Kong  
Hungary  
Indonesia  
Iran  
Ireland  
Israel  
Ivory Coast  
Japan  
Jordan  
Kuwait  
Libya  
Lithuania  
Malaysia  
Mauritius  
Mexico  
Morocco  
New Zealand  
Peru  
Portugal  
Romania  
Saudi Arabia  
Senegal  
Slovakia  
Slovenia  
Sweden  
Taiwan  
Thailand  
Tunisia  
Turkey  
Venezuela  
Yugoslavia

### Other countries

KROHNE Messtechnik GmbH & Co. KG  
Ludwig-Krohne-Str. 5  
D-47058 Duisburg  
Phone: +49 [0]203 301 389  
Fax: +49 [0]203 301 389  
export@krohne.de