


# Glass tube flowmeter

## Model : F808

Spec. sheet no. FD08-08

### Description

Glass tube rotameters with small dimension are designed to be used where the installation space is limited.

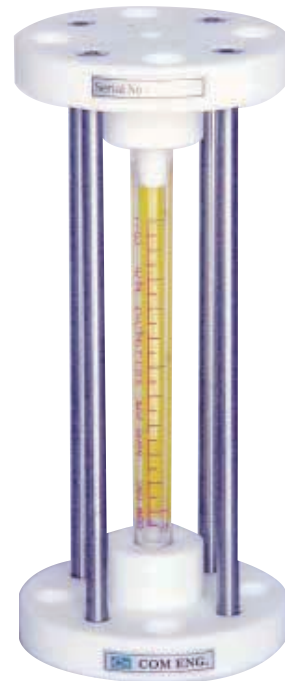

### Specification

#### Process connection

Flanged

#### Pressure rating

Max.8 kgf/cm<sup>2</sup>

#### Size

15A ~ 50A

#### Temperature rating

Max.120 °C

#### Material

Steel  
304SS  
316SS

#### Accuracy

±2.0 % of full scale  
±1.0 % of full scale (Option)

**WISE**<sup>®</sup>

| F808\_01

**1. Base model****F808** Glass tube flowmeter**2. Flow direction type****D1** Bottom and top**3. Line size**

JIS	mm	ANSI	inch	DIN	mm
<b>J015</b>	15A	<b>A001</b>	½B	<b>D015</b>	15A
<b>J020</b>	20A	<b>A002</b>	¾B	<b>D020</b>	20A
<b>J025</b>	25A	<b>A003</b>	1B	<b>D025</b>	25A
<b>J040</b>	40A	<b>A004</b>	1½B	<b>D040</b>	40A
<b>J050</b>	50A	<b>A005</b>	2B	<b>D050</b>	50A
<b>XXXX</b>	Other				

**4. Flange rating and connection type**

**J010** JIS 10K  
**A010** ANSI 150 Lb  
**P010** PN10  
**XXXX** Other

**5. Main material (See material table)**

**A** Body material / Carbon steel  
**B** Body material / 304SS  
**C** Body material / 316SS  
**O** Other

**6. Float material**

**A** Acetal  
**4** 304SS  
**5** 316SS  
**F** PTFE  
**P** PVC  
**O** Other

**7. Option**

**10** One point alarm  
**20** Two point alarm  
**NO** None

1	2	3	4	5	6	7	
<b>F808</b>	<b>D1</b>	<b>J015</b>	<b>J010</b>	<b>A</b>	<b>5</b>	<b>NO</b>	<b>Sample ordering code</b>

## Flow chart

Float Size	Standard flow rate water (m <sup>3</sup> /h)		Measuring range				Pressure loss (mmH <sub>2</sub> O)		Pressure rating (kgf/cm <sup>2</sup> )	Dimension (mm)  L
	304SS	PVC	Water (m <sup>3</sup> /h)		Air (Nm <sup>3</sup> /h)		H <sub>2</sub> O	Air		
15A	0.1 ~ 1	0.08 ~ 0.8	0.03 ~ 0.3 0.2 ~ 2	0.03 ~ 0.3 0.15 ~ 1.5	0.3 ~ 3 1.2 ~ 12	0.3 ~ 3 2 ~ 20	100	20	8	254
20A	0.15 ~ 1.5	0.12 ~ 1.2	0.03 ~ 0.3 0.2 ~ 2	0.03 ~ 0.3 0.15 ~ 1.5	0.3 ~ 3 2 ~ 20	0.3 ~ 3 3 ~ 30	200	30	8	254
25A	0.35 ~ 3.5	0.25 ~ 2.5	0.15 ~ 1.5 0.5 ~ 5	0.1 ~ 1 0.35 ~ 3.5	1 ~ 10 4 ~ 40	1.5 ~ 15 6 ~ 60	250	40	5	290
32A	0.6 ~ 6	0.45 ~ 4.5	0.3 ~ 3 0.7 ~ 7	0.25 ~ 2.5 0.6 ~ 6	2 ~ 20 7 ~ 70	3 ~ 30 10 ~ 100	300	50	5	290
40A	1 ~ 10	0.8 ~ 8	0.35 ~ 3.5 1.2 ~ 12	0.3 ~ 3 1.0 ~ 10	3 ~ 30 12 ~ 120	4.5 ~ 45 15 ~ 150	350	60	5	300
50A	1.5 ~ 15	1.2 ~ 12	1 ~ 10 2 ~ 20	0.8 ~ 8 1.5 ~ 15	3.5 ~ 35 15 ~ 150	5 ~ 50 2 ~ 200	400	100	4	320

\* When the size is larger than 65A, to be consulted with a maker

## Material table

Part list	Material code		
	A	B	C
Flange	Carbon steel	304SS	316SS
Float	304SS / 316SS, PVC, Teflon, Acetal		
Taper tube	Pyrex glass		
Guide rod	304SS / 316SS		
Packing	NBR	NBR, Viton, EPDM	
Stay bolt	Carbon steel	304SS	
Nut	Carbon steel	304SS	

\* Guide rod can be excluded as per flow rate

## Dimension

